


QUATTROFLEX 3/2

Description

The QuattroFlex 3/2 stenter frame is a modified successor model to the well-known well-known QuattroFlex 2 stenter frame system. It is now a stencil system with less weight. The difference to the 3rd generation, our QuattroFlex 3 stencil frame system, is that that no clamping device is required.

The metal t is then fixed in place using hold-down brackets.

The Venturi valve is installed directly on the clamping frame, with which the clamping pistons can be retracted and extended.

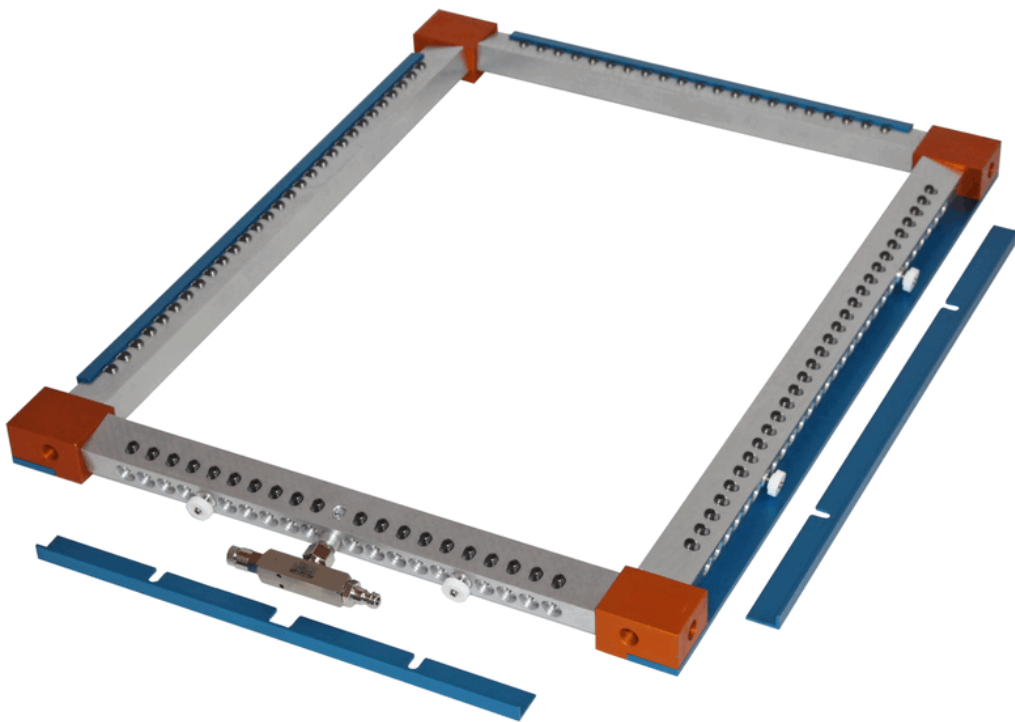

508 X 490 mm

584 X 566 mm

720 X 480 mm

720 X 584 mm

Part number: 100525

Part number: 100526

Part number: 100527

Part number: 100528

Technical Data:

QUATTROFLEX 3/2 508 x 490 mm - 100525

Quick clamping system
incl. knurled screws, hold-down bracket
angle and Venturi valve

Internal dimensions: 400 x 400
stencil dimensions: 479.5 x 479.5
Weight: 3.8 kg
Number of pistons: 108
Color: silver/blue with orange corner connectors

QUATTROFLEX 3/2 584 x 566 mm - 100526

Quick clamping system
incl. knurled screws, hold-down bracket
angle and Venturi valve

Internal dimensions: 475 x 475
stencil dimensions: 555.5 x 555.5
Weight: 4,2 kg
Number of pistons: 124
Color: silver/blue with orange corner connectors

QUATTROFLEX 3/2 720 x 480 mm - 100527

Quick clamping system
incl. knurled screws, hold-down bracket
angle and Venturi valve

Internal dimensions: 647 x 374 mm
stencil dimensions: 709.5 x 451,5 mm
Weight: 5,2 kg
Number of pistons: 136
Color: silver/blue with orange corner connectors

QUATTROFLEX 3/2 720 x 584 mm - 100528

Quick clamping system
incl. knurled screws, hold-down bracket
angle and Venturi valve

Internal dimensions: 620 x 475
stencil dimensions: 709.5 x 555,5
Weight: 5,2 kg
Number of pistons: 148
Color: silver/blue with orange corner connector