

QUATTROFLEX 3

Description


The third evolutionary stage gives the QuattroFlex 3 the capabilities that will continue to make it the market leader in the future.

The legendary functional reliability has been further improved by technical modifications and the changeover time - with the help of the clamping device - has been reduced to an absolute minimum. Damage to the stencils is virtually eliminated.

The frame is also lighter than its predecessor, making it even easier to handle.

The new version no longer requires hold-down angles.

The frame is clamped and unclamped using the optional clamping device.

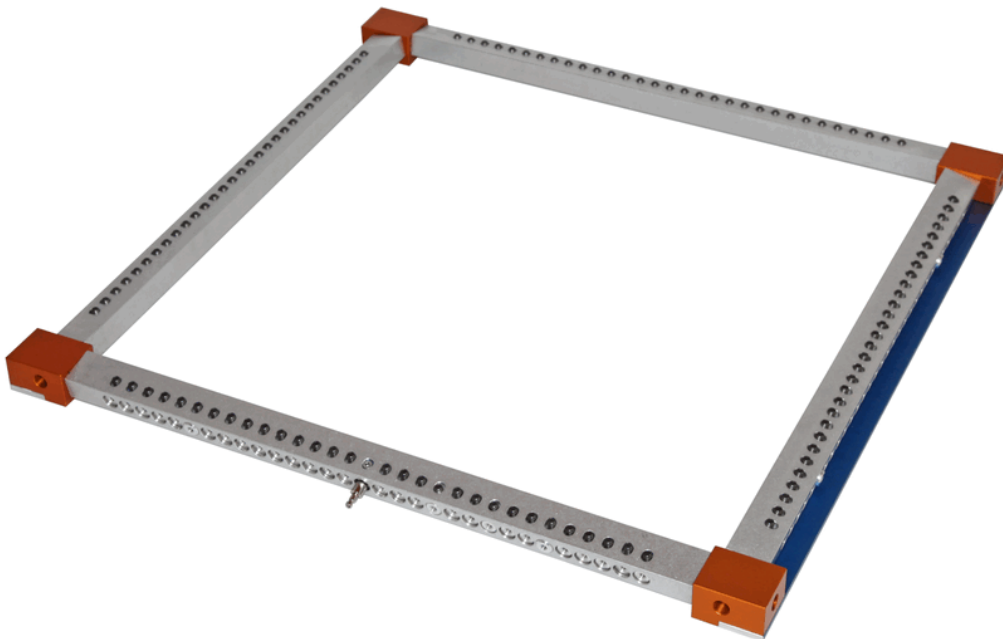

508 X 490 mm

584 X 566 mm

720 X 480 mm

720 X 584 mm

Part number: 100438

Part number: 100427

Part number: 100473

Part number: 100429

Technical Data:

100438 QUATTROFLEX 3 508 x 490 mm Internal dimensions: 400 x 400 stencil dimensions: 479.5 x 479.5 Weight: 3.6 kg Number of pistons: 108 Color: silver/blue with orange corner connectors
100427 QUATTROFLEX 3 584 x 566 mm Internal dimensions: 475 x 475 stencil dimensions: 555.5 x 555.5 Weight: 4,2 kg Number of pistons: 124 Color: silver/blue with orange corner connector
100473 QUATTROFLEX 3 720 x 480 mm Internal dimensions: 647 x 374 stencil dimensions: 709.5 x 451,5 mm Weight: 4,9 kg Number of pistons: 136 Color: silver/blue with orange corner connectors
100429 QUATTROFLEX 3 720 x 584 mm Internal dimensions: 620 x 475 stencil dimensions: 709.5 x 555,5 Weight: 5,2 kg Number of pistons: 148 Color: silver/blue with orange corner connectors

Suitable clamping device:

100428	clamping device for QuattroFlex 3 584 x 566 mm
100465	clamping device for QuattroFlex 3 584 x 566 mm with flat LED under-lighting / dimmable
100430	clamping device for QuattroFlex 3 720 x 584 mm
100437	clamping device for QuattroFlex 3 508 x 490 mm